





ZS2000-1323 | M8 socket field assembly, sensor and power, IP 65/67

M8, socket, straight, female, 4-pin, A-coded

Electrical data	
Rated voltage	32 V
Rated current	4 A at 40 °C (according to IEC 61076-2-104)
Rated impulse voltage	1.5 kV
Shielding	no
Contact resistance	< 10 mΩ
Insulation group	I
Mechanical data	
Accessories Type	Connectors for field assembly
Installation size	M8
Connector type	socket
Configuration	straight
Contact type	female
Number of positions (face)	4-pin
Coding	A-coded
Wire termination	IDC
Recommended torque, nut	0.4 Nm
Mating cycles	≥ 100 (according to IEC 60512-9a)
Way of locking	screw
Weight per piece	0.015 kg (0.0322 lb)
Body colour	metal
Body material	Zinc diecast / PA
Coupling nut material	CuZn, Ni
Contact carrier colour	black
Contact carrier material	PA, UL 94
Contact plating	Au
Contact material	CuZn
Max. wire cross section	AWG26 ... AWG22 (0.14 mm ² ... 0.34 mm ²)
Max. cable outer diameter	2.5 - 5.1 mm
Environmental data	
RoHS compliant	yes

Ambient temperature (operation)	-40...+85 °C, -40...+185 °F
Protection class	IP 65/67 in screwed condition (according to IEC 60529)
Pollution level	3/2 (according to IEC 60664-1)
Approvals	UL

Dimensions

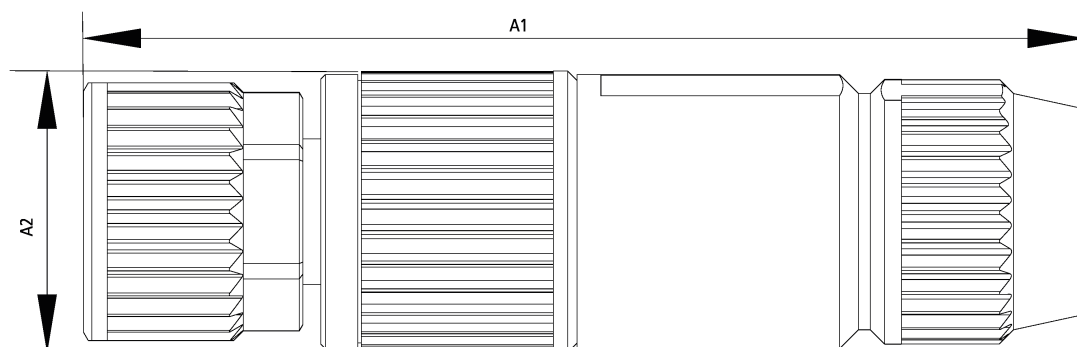

A1	42.00 mm
A2	11.50 mm

Notes

- Illustrations similar

Ordering information	
ZS2000-1323	Socket field assembly, Sensor and Power, IP 65/67, M8, straight, female, 4-pin, A-coded, 0.14...0.34 mm ² , Ø 3.5...5 mm

Accessories	
ZB8801-0000	torque wrench for hexagonal plugs, adjustable
ZB8801-0002	torque cable key, M12/wrench size 13, for ZB8801-0000

Beckhoff®, TwinCAT®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 02/2021

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.