





ZS2000-6710 | M12 plug field assembly, sensor, IP 67, shielded

M12, plug, straight, male, 5-pin, A-coded

Electrical data	
Rated voltage	60 V (according to IEC 61076-2-101)
Rated current	4 A at 40 °C (according to IEC 61076-2-101)
Shielding	yes
Insulation resistance	≥ 100 MΩ (according to IEC 60512)
Mechanical data	
Accessories Type	Connector
Installation size	M12
Connector type	plug
Configuration	straight
Contact type	male
Number of positions (face)	5-pin
Coding	A-coded
Wire termination	screw connection
Recommended torque, nut	0.6 Nm
Recommended torque, screw termination	0.3 Nm
Mating cycles	≥ 100 (according to IEC 60512-9a)
Way of locking	screw
Weight per piece	0.046 kg (0.1014 lb)
Body colour	metal
Body material	GD-Zn, Ni
Coupling nut material	GD-Zn, Ni
Seal	FPM
O-ring	NBR
Contact carrier colour	red
Contact carrier material	PA, UL 94
Contact plating	Ni, Au gal.
Contact material	CuZn
Max. wire cross section	max. 0.75 mm ² (AWG18)
Max. cable outer diameter	4 - 8 mm

Environmental data	
Special features	halogen-free, flame-resistant as per IEC 60332-1-2, oil-resistant as per DIN EN 60811-2-1
RoHS compliant	yes
Ambient temperature (operation)	-30...+85 °C, -22...+185 °F
Protection class	IP 65/67 in screwed condition (according to IEC 60529)
Pollution level	3/2 (according to IEC 60664-1)

Dimensions

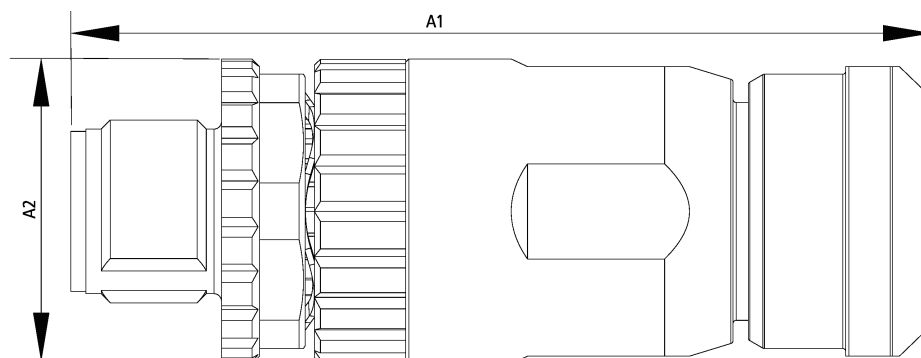

A1	57.00 mm
A2	Ø 20.00 mm

Notes

- Illustrations similar

Ordering information	
ZS2000-6710	Plug field assembly, Sensor, IP 67, M12, straight, male, 5-pin, A-coded, 0.25...1.5 mm ² , Ø 4...8 mm, shielded

Accessories	
ZB8801-0000	torque wrench for hexagonal plugs, adjustable
ZB8801-0003	torque cable key, M12F/wrench size 18, for ZB8801-0000

Beckhoff®, TwinCAT®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 02/2021

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.